

Cursa Single Colour



The Cursa LED spot is an exceptionally high performance recessed down lighter. It is a premium quality solid state lighting product precisely engineered and manufactured with state of the art technologies and materials.

The Cursa can be used in residential and commercial markets and in combination with our led drivers the Cursa LED spot is perfectly dimmable.



Features

Housing

Small design

Low power consumption

7 Watt

Perfect dimmable

100-0%

Lifespan

50.000+ hours

Technical specifications

LED	Colour temperature: Colour rendering: Lumen output:	2700K* CRI>90 630 lumen
Power	Power: Consumption: Efficiency LED driver:	24VDC CLASS 2 INPUT ONLY 7 Watt >90%
Accessories	Flanges: Flange colours:	Round White / Black
Miscellaneous	Material: Cut-out: Lifespan: Lenses: IP-Rating: Certifications: Warranty:	Aluminium + PMMA ø60mm >50.000 hour L80 [10K] 16° / 22° / 36° / 44° IP20 cMETus E114112 Glow wire test 2198667.01 5 years


*Other colour temperatures available on request





Cursa Single Colour

Dimensions




Wiring

Use min 90°C supply conductors when connecting to the Cursa led spot.

Only use power supplies which can deliver a constant dc-voltage between 21~24VDC.

The Cursa led spot is prepared with a two wired cable.



CAUTION:

To prevent the risk of fire/electric shock use only a LISTED/CERTIFIED Class 2 LED driver

Order Code

- CU.27.RO.W - Cursa Recessed Fixed Downlighter; 2700K; Round Flange White*
- CU.27.RO.B - Cursa Recessed Fixed Downlighter; 2700K; Round Flange Black*

Order Code Optics

- CCCC.S.16 - Lens 16° for Cursa
- CCCC.S.22 - Lens 22° for Cursa
- CCCC.S.36 - Lens 36° for Cursa
- CCCC.S.44 - Lens 44° for Cursa


Order Code Accessoires

- CU.F.RO.W - White flange for Cursa round*
- CU.F.RO.B - Black flange for Cursa round*


*Different flange colours available on special request

Photometric data


Polar chart 16° optic




Polar chart 22° optic



Polar chart 36° optic




Polar chart 44° optic





Cursa Single Colour

Minimum Spacings

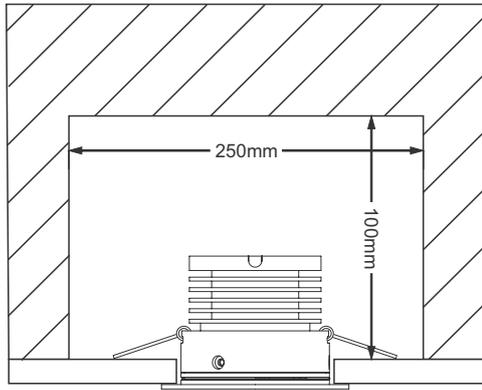

Luminaire not suitable for covering
with thermal insulating materials.
Allow air to flow freely around fixture.