



IZI-Link DMX Interface



The IZI-Link DMX interface is needed to setup an IZI-Link system. An IZI-Link system utilises powerline communication to transmit data over a low power voltage network, allowing you to control, monitor and configure each IZI-Link enabled product.

This technique eliminates additional control wiring to IZI-Link enabled LED-spots and LED-drivers which make the installation more reliable and easy to install. The IZI-Link system can easily be scaled into a larger network by adding IZI-Link interfaces.

The IZI-Link DMX Interface is controllable through DMX-512 and has 4 additional galvanically isolated contact inputs to override DMX-control for use as emergency contacts or local control switches.

Features

High power
480 Watt

Simple installation
2 Wire cable for power and data

Commisioning
Remote configuring

Emergency contact
System override contact inputs

Technical specifications


Power	Input voltage:	48VDC
	Output voltage:	48VDC (IZI-Link)
	Output power:	Max. 480W
	Current output:	Max. 10A
Control	Control in/out:	DMX-512 / 1990 galvanically isolated
	Dry contact input:	4 galvanically isolated
Miscellaneous	Housing:	DIN-rail (4 module width)
	Input connector:	Print connector
	Screw terminal power connections:	Max. 2,5mm ²
	Screw terminal DMX-512:	Max. 1,5mm ²
	Screw terminal dry contacts:	Max. 1,5mm ²



TDE-lighttech
illuminating creativity

IZI-Link DMX Interface

Dimensions

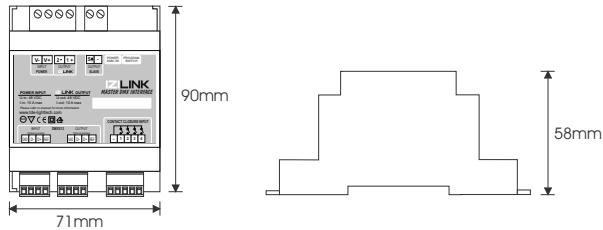

Wiring

Use min 90°C supply conductors when connecting to the IZI-LINK DMX interface

Only use power supplies which can deliver a constant dc-voltage of 48VDC

Order Code

IZI.IF.DMX - IZI-Link DMX interface; 48VDC; Max 10A; Din rail
CAB.USB.IZI-LINK - USB to IZI-link programmer cable

System overview

A simple overview of an IZI-Link system is shown below. An IZI-Link system is easily scalable, the below shows only a basic system, countless other configurations are possible.

